

Linear actuator Matrix series





Matrix series

The Matrix series is designed for medical devices and includes powerful AC and DC linear actuators using DC motor.

They run very quietly, take up little space and can be installed at virtually every angle in vertical or horizontal position. The series is medical approved by third parties and available with options like anti-pitching, incremental position feedback and emergency lowering. The Matrix series can be supplied as a full system with controls, operating units and accessories.



Features

- Designed for medical devices
- Full system with controls, operating units and accessories
- Back up nut as standard
- Safety factor up to 4

Benefits

- Synchronization possible
- Silent operation
- Compact and aesthetic
- Back-up nut as standard

Matrix1

Linear actuator



Benefits

- Silent operation
- Full system with control unit, switch and accessories
- Synchronization possible
- Compact and aesthetic
- Back-up nut as standard


Technical data

	Unit	MAX1..A..	MAX1..B..	MAX1..C..
Rated push load	N	4 000	2 000	1 500
Rated pull load	N	4 000	2 000	1 500
Speed (full load to no load)	mm/s	5 to 7	6 to 9	13 to 18
Stroke	mm	50 to 700	50 to 700	50 to 700
Retracted length	mm	S + 195/260 ¹⁾	S + 195/260 ¹⁾	S + 195/260 ¹⁾
Voltage	V DC	24	24	24
Power consumption	W	120	120	120
Current consumption	A	5	5	5
Duty cycle	%	10 (1/9)	10 (1/9)	10 (1/9)
Ambient temperature	°C	0 to +40	0 to +40	0 to +40
Type of protection	IP	66S	66S	66S
Weight (at 200 mm stroke)	kg	4	3,7	3,6
Color	–	Grey	Grey	Grey


¹⁾ S < 350 mm, L = 195 + S
S > 350 mm, L = 260 + S

Dimensional drawing


Side view

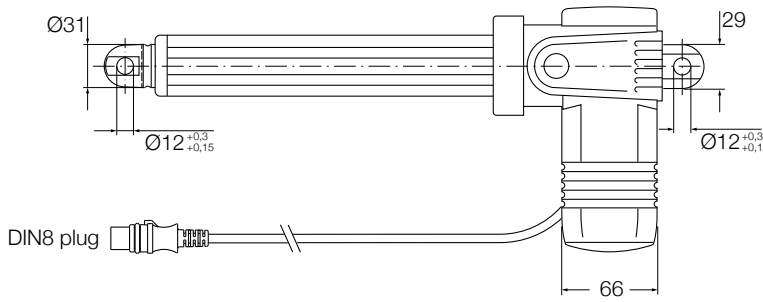

Front view

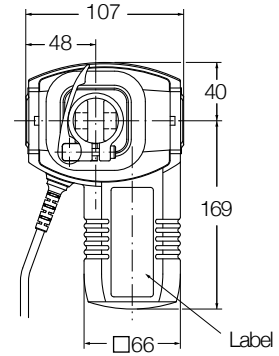


Top view

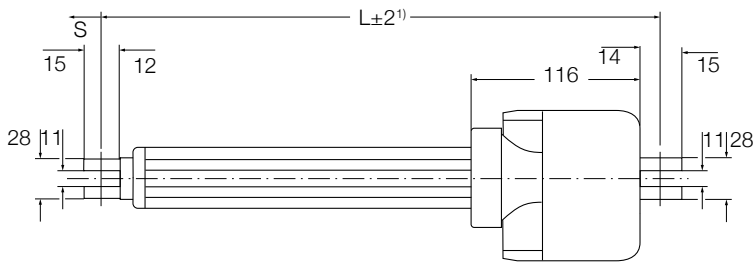


¹) S < 350 mm; L = 195 + S
S > 350 mm; L = 260 + S



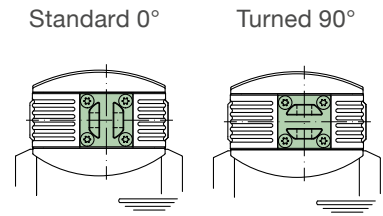



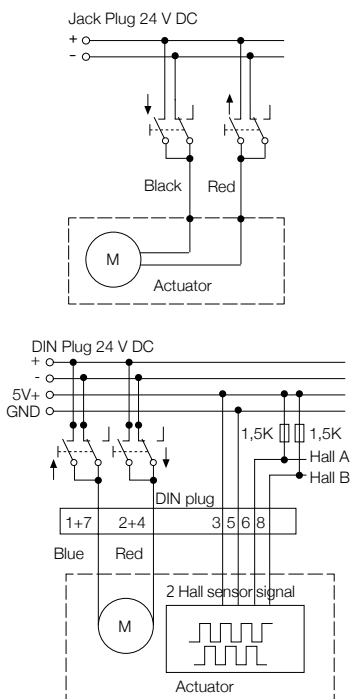


Rear view



Connecting diagrams




Suitable control units and accessories

	Control units			
	SCU	VCU	BCU	MCU
MAX 1	•	•	•	•
Operating switches				
EHA 1 				•
EHA 3 	•	•	•	
STJ 	•	•	•	
STF 				•
STE 	•	•	•	
STA 				•
 Hand switch		 Foot switch		 Desk switch

Performance diagrams


Speed-load diagram

Speed [mm/s]

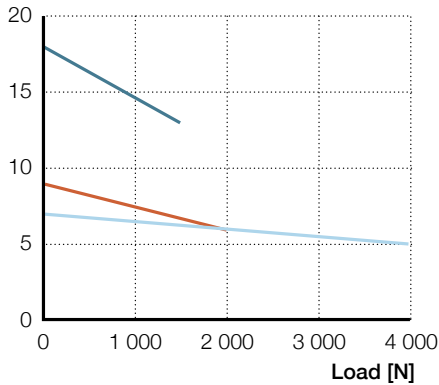

Current-load diagram

Current consumption [A]

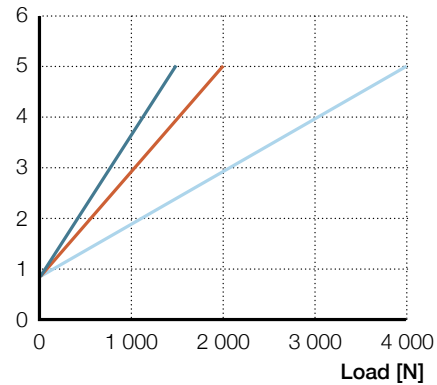


— Rated push force 1 500

— Rated push force 2 000

— Rated push force 4 000


Safety factor load conditions

Load [N]

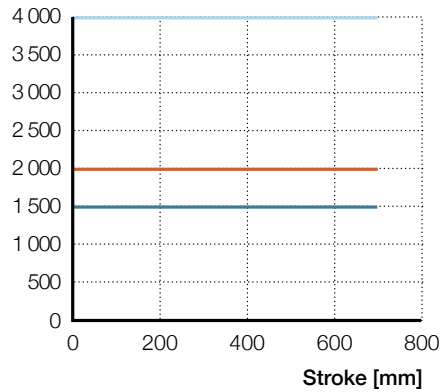


Push load reduction static
Safety factor S=1

Load [N]

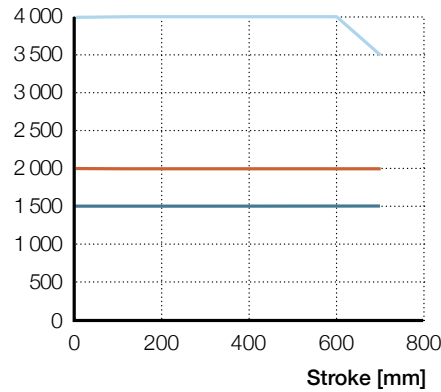

Push load reduction static
Safety factor S=2

Load [N]

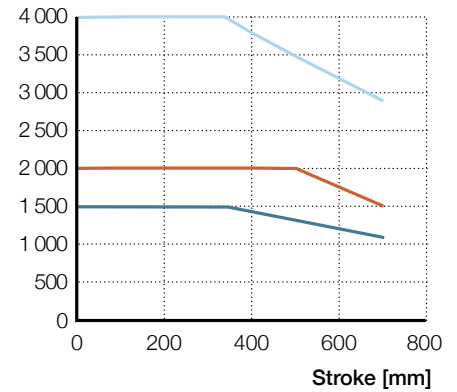


Push load reduction static
Safety factor S=4 (EN60601)

— Rated push force 1 500

— Rated push force 2 000

— Rated push force 4 000

Ordering key

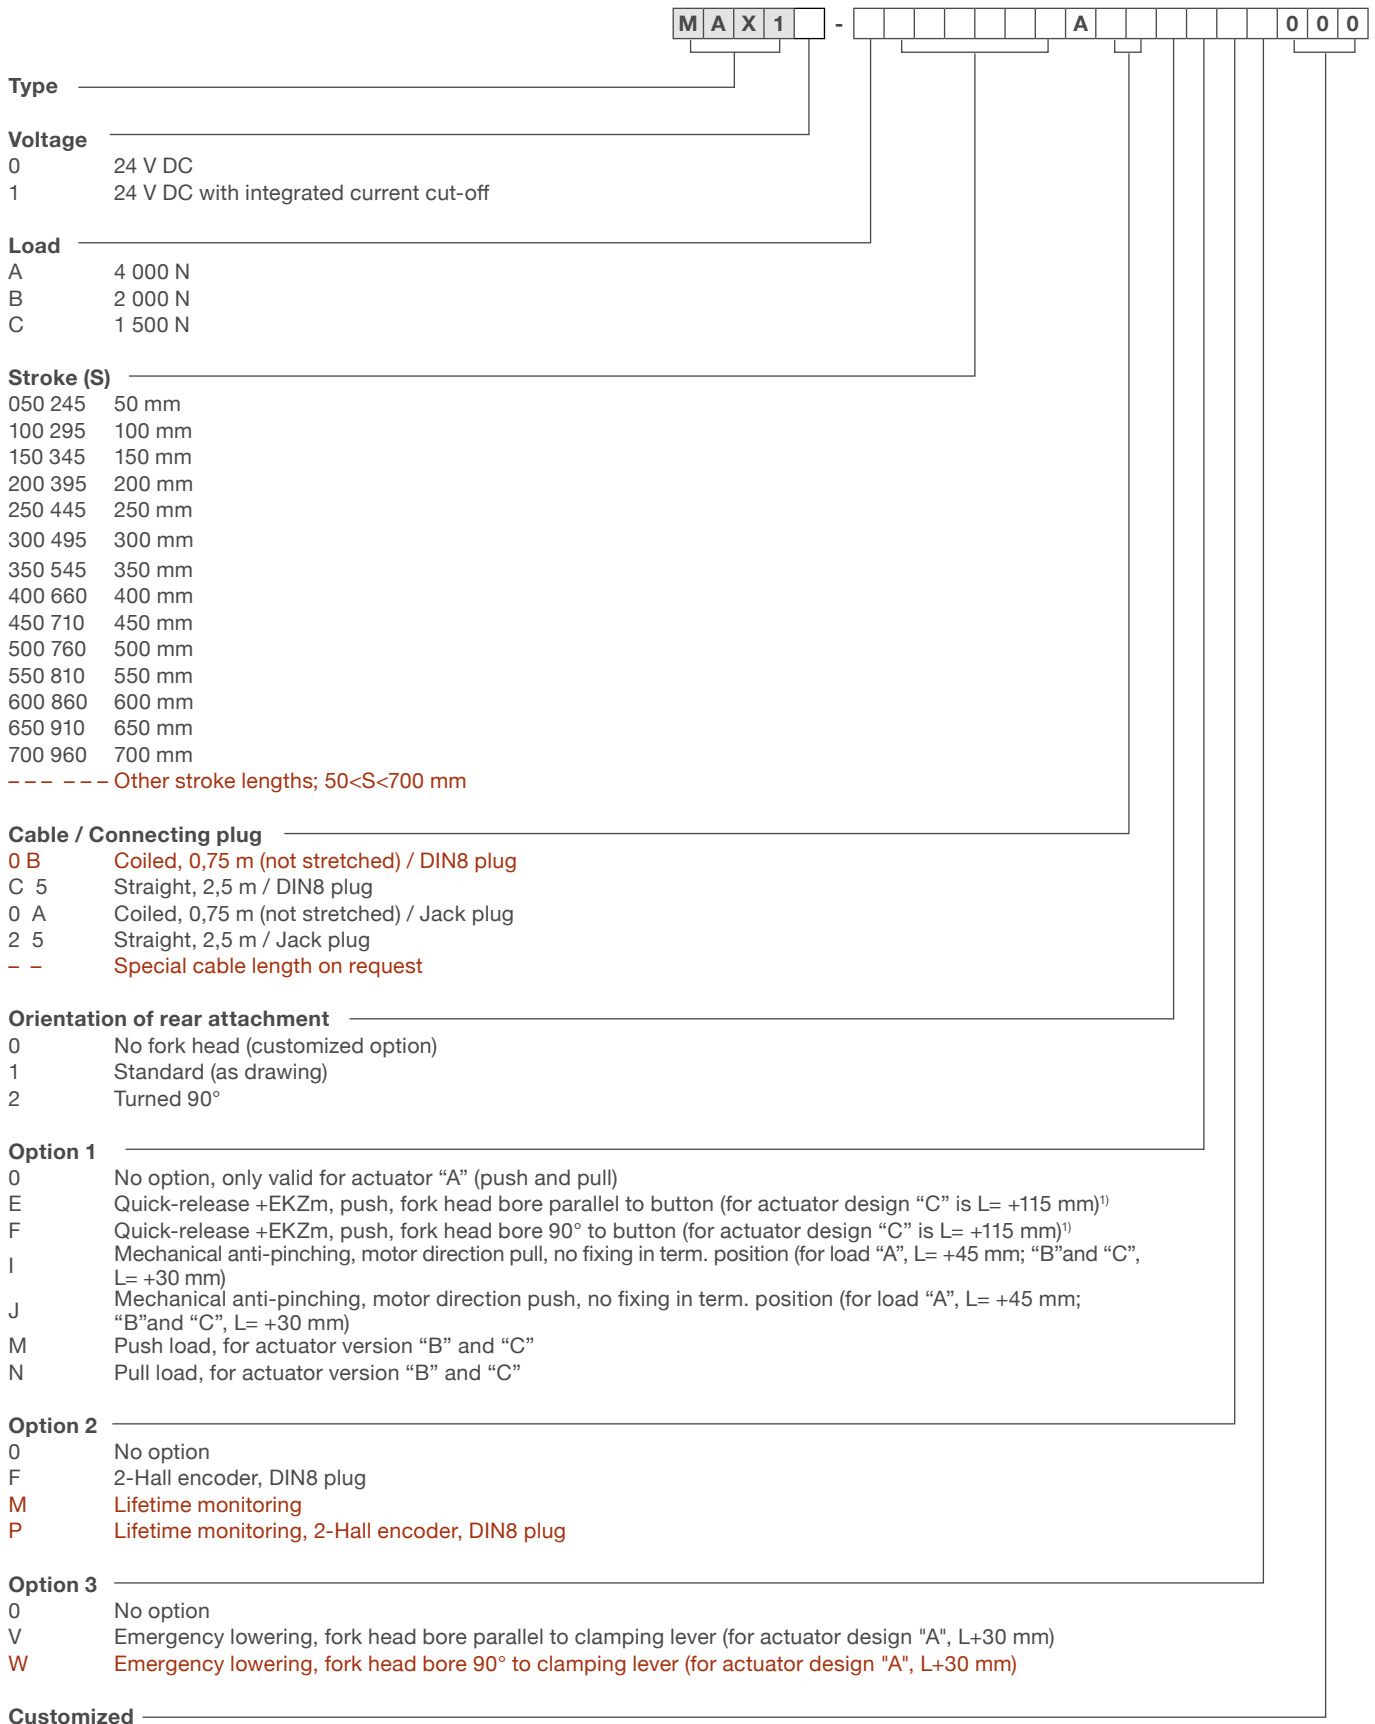

¹⁾ EKZm: mechanical anti-pinching min. stroke 150 mm up to 300 mm

■ Options shown in red are only available on request. Contact Ewellix for more information on minimum quantities and additional costs.

Matrix3

Linear actuator



Benefits

- Silent operation
- Full system with control unit, switch and accessories
- Synchronization possible
- Compact and aesthetic
- Back-up nut as standard

Technical data


	Unit	MAX3..A..	MAX3..B..	MAX3..C..
Rated push load	N	8 000	4 000	3 000
Rated pull load	N	6 000 ¹⁾	4 000	3 000
Speed (full load to no load)	mm/s	5 to 7	6 to 9	13 to 18
Stroke	mm	50 to 700	50 to 700	50 to 700
Retracted length	mm	S + 215/280 ²⁾	S + 215/280 ²⁾	S + 215/280 ²⁾
Voltage	V DC	12 or 24	12 or 24	12 or 24
Power consumption	W	120	120	120
Current consumption	A	5	5,2	5,2
Duty cycle	%	10 (1/9)	10 (1/9)	10 (1/9)
Ambient temperature	°C	0 to +40	0 to +40	0 to +40
Type of protection	IP	66S	66S	66S
Weight (at 200 mm stroke)	kg	4,5	4,2	4
Color	–	Grey	Grey	Grey

¹⁾ Max load for medical application is 5 000 N


²⁾ S ≤ 350 mm; L = S + 215
S > 350 mm; L = S + 280

Dimensional drawing


Side view

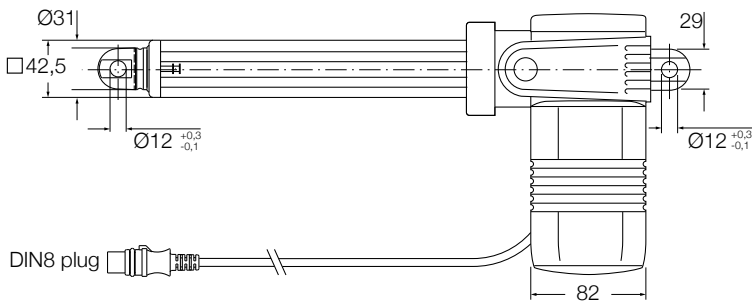


Front view

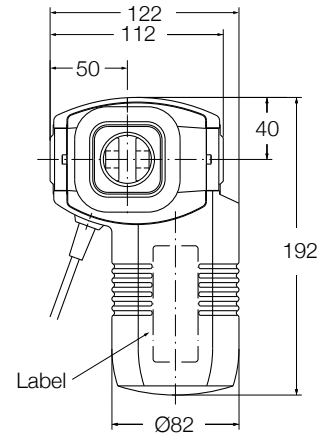

Top view

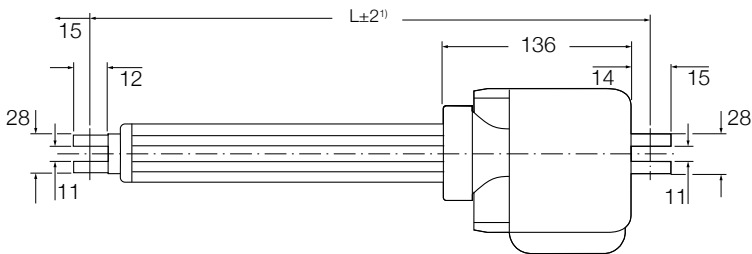


Rear view

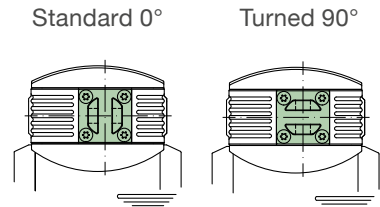





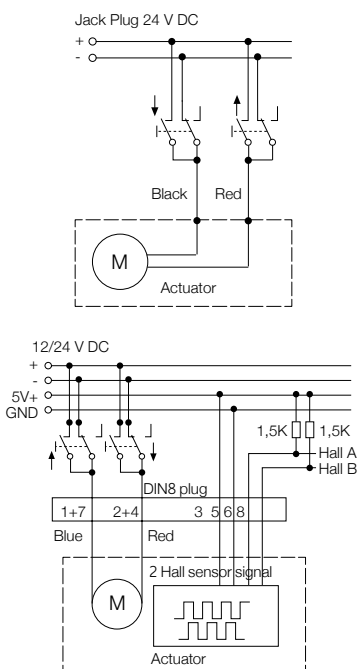




¹) S < 350 mm; L = 215 + S
S > 350 mm; L = 280 + S

Connecting diagrams



Suitable control units and accessories

	Control units			
	SCU	VCU	BCU	MCU
MAX 3	•	•	•	•
Operating switches				
EHA 1 				•
EHA 3 	•	•	•	
STJ 	•	•	•	
STF 				•
STE 	•	•	•	
STA 				•


 Hand switch
  Foot switch
  Desk switch

¹) Only valid for MAX 31. MAX 30 must be operated by a BCU, MCU, SCU or VCU control unit.

Performance diagrams


Speed-load diagram

Speed [mm/s]

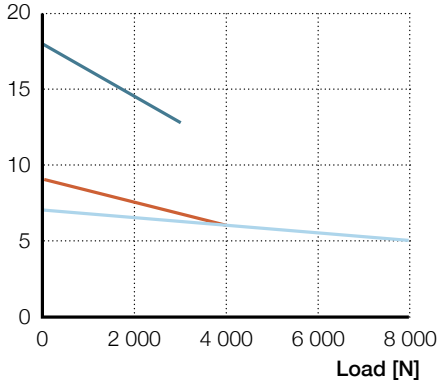

Current-load diagram

Current consumption [A]

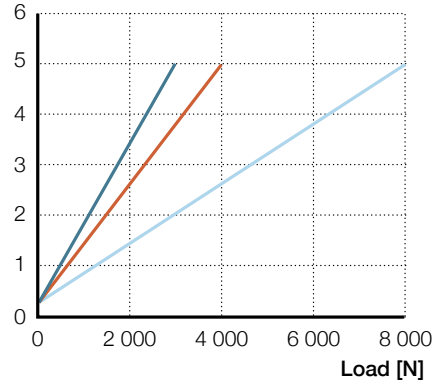


— Rated push force 3 000

— Rated push force 4 000

— Rated push force 8 000


Safety factor load conditions

Load [N]

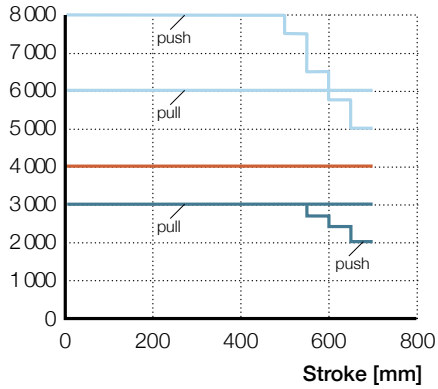


Push load reduction static
Safety factor S=1

Load [N]

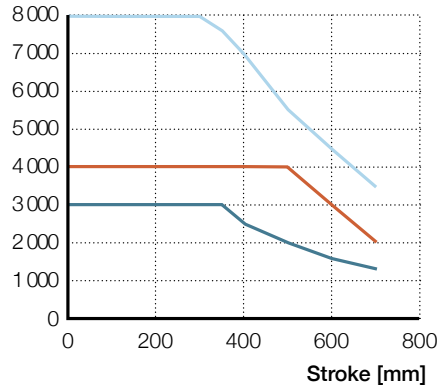

Push load reduction static
Safety factor S=2

Load [N]

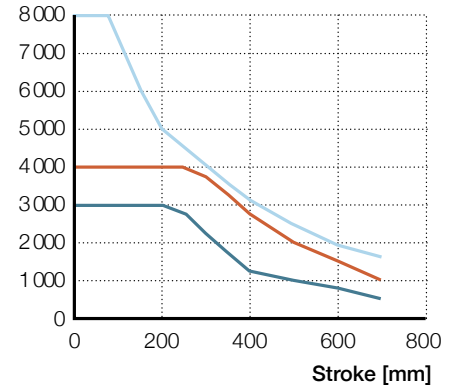

Push load reduction static
Safety factor S=4 (EN60601)

— Rated push force 3 000

— Rated push force 4 000

— Rated push force 8 000

Ordering key

		M	A	X	3	-										A							0	0	0
Type																									
Voltage																									
0	24 V DC																								
1	24 V DC with integrated current cut-off																								
2	12 V DC																								
Load																									
A	8 000 N																								
B	4 000 N																								
C	3 000 N																								
Stroke (S)																									
050 265	50 mm																								
100 315	100 mm																								
150 365	150 mm																								
200 415	200 mm																								
250 465	250 mm																								
300 515	300 mm																								
350 565	350 mm																								
400 680	400 mm																								
450 730	450 mm																								
500 780	500 mm																								
550 830	550 mm																								
600 880	600 mm																								
650 930	650 mm																								
700 980	700 mm																								
--- Other stroke lengths; 50 < S < 700 mm																									
Cable / Connecting plug																									
0 B	Coiled, 0,75 m (not stretched) / DIN8 plug																								
C 5	Straight, 2,5 m / DIN8 plug																								
0 A	Coiled, 0,75 m (not stretched) / Jack plug																								
2 5	Straight, 2,5 m / Jack plug																								
--	Special cable length on request																								
Orientation of rear attachment																									
0	No fork head (customized option)																								
1	Standard (as drawing)																								
2	Turned 90°																								
Option 1																									
0	No option, only valid for actuator "A" (push and pull)																								
E	Quick-release +EKZm, push, fork head bore parallel to button (for actuator design "C" is L= +115 mm) ¹⁾																								
F	Quick-release +EKZm, push, fork head bore 90° to button (for actuator design "C" is L= +115 mm) ¹⁾																								
I	Mechanical anti-pinching, motor direction pull, no fixing in term. position (for load "A", L= +45 mm; "B" and "C", L= +30 mm)																								
J	Mechanical anti-pinching, motor direction push, no fixing in term. position (for load "A", L= +45 mm; "B" and "C", L= +30 mm)																								
K	Electrical anti-pinching protection, motor direction pull																								
L	Electrical anti-pinching protection, motor direction push																								
M	Push load, for actuator version "B" and "C"																								
N	Pull load, for actuator version "B" and "C"																								
Option 2																									
0	No option																								
F	2-Hall encoder, DIN8 plug																								
M	Lifetime monitoring																								
P	Lifetime monitoring, 2-Hall encoder, DIN8 plug																								
Option 3																									
0	No option																								
V	Emergency lowering, fork head bore parallel to clamping lever (for actuator design "A", L+30 mm)																								
W	Emergency lowering, fork head bore 90° to clamping lever (for actuator design "A", L+30 mm)																								
Customized																									

¹⁾ EKZm: mechanical anti-pinching min. stroke 150 mm up to 300 mm

■ Options shown in red are only available on request. Contact Ewellix for more information on minimum quantities and additional costs.

Matrix7

Linear actuator



Benefits

- Universal power supply
- Power indicator
- Plug and play with integrated control unit
- Designed for medical devices, compliant to IEC 60601-1

Technical data

	Unit	MAX7..A..	MAX7..B..	MAX7..C..
Rated push load	N	8 000	4 000	3 000
Rated pull load	N	6 000 ¹⁾	4 000	3 000
Speed (full load to no load)	mm/s	6 to 7,5	8 to 10	13 to 18
Stroke	mm	50 to 700	50 to 700	50 to 700
Retracted length	mm	S + 215/280 ²⁾	S + 215/280 ²⁾	S + 215/280 ²⁾
Voltage	V	100-240 AC 50/60 Hz	100-240 AC 50/60 Hz	100-240 AC 50/60 Hz
Power consumption	W	180	180	180
Current consumption	100 V AC	A	3,2	3,2
	240 V AC	A	1,6	1,6
Duty cycle	%	10 (1/9)	10 (1/9)	10 (1/9)
Ambient temperature	°C	0 to +40	0 to +40	0 to +40
Type of protection	IP	66S	66S	66S
Weight (at 200 mm stroke)	kg	4,8	4,5	4,2
Color	–	Grey	Grey	Grey


¹⁾ Max load for medical application is 5 000 N

²⁾ S < 350 mm; L = S + 215


S > 350 mm; L = S + 280

Dimensional drawing


Side view

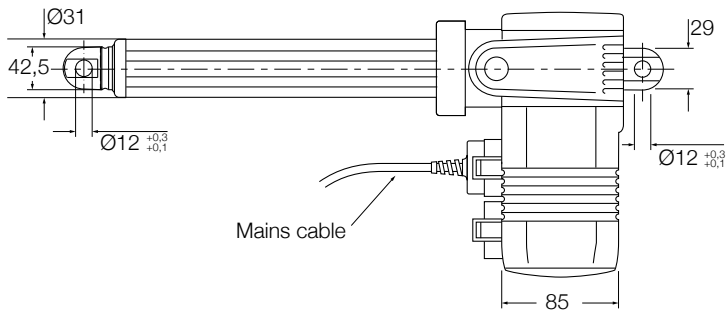


Front view

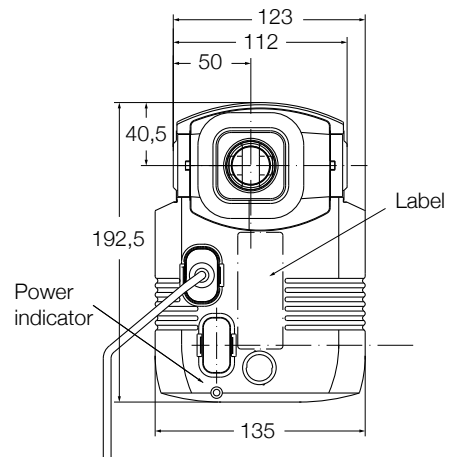

Top view

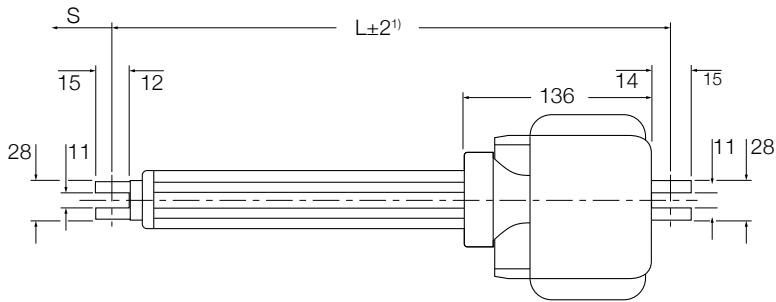


Rear view

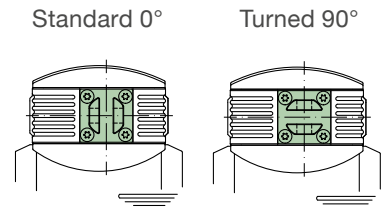





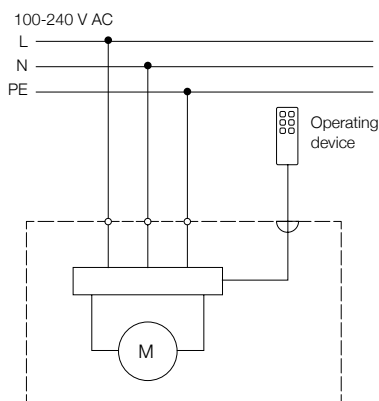




¹⁾ S < 350 mm; L = 215 + S
S > 350 mm; L = 280 + S

Connecting diagrams




Suitable operating switches

	Operating switches					
	 EHA1	 PHC	 STF	 PFP	 STA	 PAM
MAX70						
MAX72/74						


 Hand switch
  Foot switch
  Desk switch

Performance diagrams

Speed-load diagram

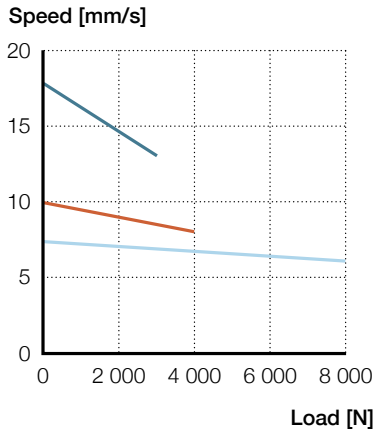


Current-load diagram

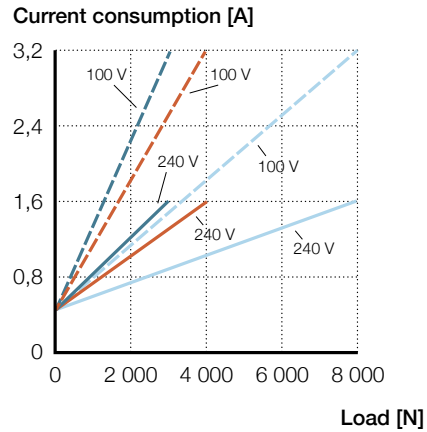


— Rated push force 3 000 — Rated push force 4 000 — Rated push force 8 000


Safety factor load conditions

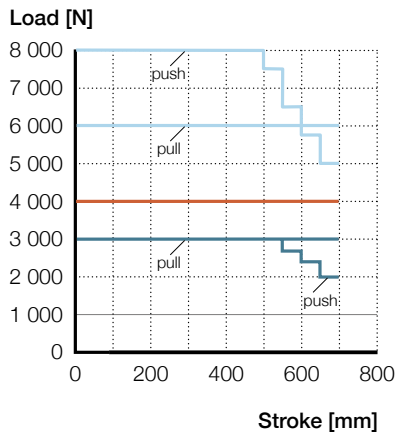

Push load reduction static
Safety factor S=1

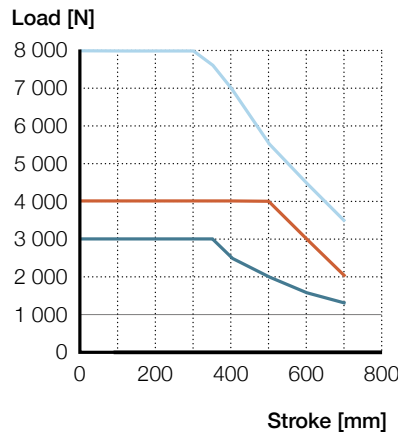

Push load reduction static
Safety factor S=2

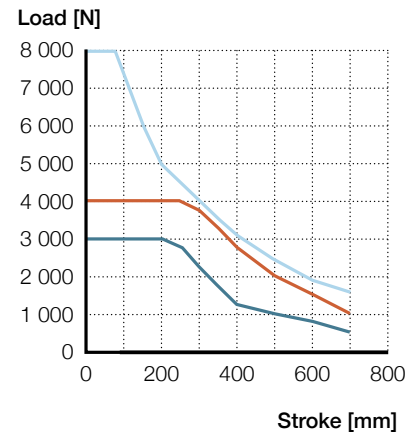

Push load reduction static
Safety factor S=4 (EN60601)

— Rated push force 3 000 — Rated push force 4 000 — Rated push force 8 000

Accessories

	Plug	Country	Designation	Order number
Straight cable 3,5 m	Schuko	DE	ZKA-140306-3500	0121723
Straight cable 3,5 m	SEV	CH	ZKA-140316-3500	0121737
Straight cable 3,5 m	UL	USA	ZKA-140355-3500	0121724
Straight cable 3,5 m	Hospital grade	USA	ZKA-140360-3500	0121732
Straight cable 3,5 m	British standard	UK	ZKA-140350-3500	0121743
Coiled cable 1,2 m / 2,2 m	Schuko	DE	ZKA-140342-1500	0121728
Coiled cable 1,2 m / 2,2 m	SEV	CH	ZKA-140378-1200	0121738
Straight polyurethane cable 3,5 m	Schuko	DE	ZKA-140422-3500	0121739
Straight polyurethane cable 3,5 m	SEV	CH	ZKA-140426-3500	0121740
Strain relief for mains cable			ZUB-952253	0102848
Tool for plugs (Jack/D-Sub/Mains)			ZWS-140375	0125322

Ordering key



Type

Voltage

- 0 100-240 V AC/50-60 Hz, integrated pneumatic control
- 2 100-240 V AC/50-60 Hz, integrated low voltage control with additional 24 V output
- 4 100-240 V AC/50-60 Hz, integrated low voltage control

Load

- A 8 000 N
- B 4 000 N
- C 3 000 N

Stroke (S)

- 050 265 50 mm
- 100 315 100 mm
- 150 365 150 mm
- 200 415 200 mm
- 250 465 250 mm
- 300 515 300 mm
- 350 565 350 mm
- 400 680 400 mm
- 450 730 450 mm
- 500 780 500 mm
- 550 830 550 mm
- 600 880 600 mm
- 650 930 650 mm
- 700 980 700 mm

----- Other stroke lengths; 50<S<700 mm

Cable / Connecting plug

- 0 No cable

Orientation of rear attachment

- 0 No fork head (customized option)
- 1 Standard (as drawing)
- 2 Turned 90°

Option 1

- 0 No option, only valid for actuator "A" (push and pull)
- E Quick-release +EKZm, push, fork head bore parallel to button (for actuator design "C" is L= +115 mm)¹⁾
- F Quick-release +EKZm, push, fork head bore 90° to button (for actuator design "C" is L= +115 mm)¹⁾
- I Mechanical anti-pinching, motor direction pull, no fixing in term. position (for load "A", L= +45 mm; "B"and "C", L= +30 mm)
- J Mechanical anti-pinching, motor direction push, no fixing in term. position (for load "A", L= +45 mm; "B"and "C", L= +30 mm)
- K Electrical anti-pinching protection, motor direction pull
- L Electrical anti-pinching protection, motor direction push
- M Push load, for actuator version "B" and "C"
- N Pull load, for actuator version "B" and "C"

Option 2

- 0 No option

Option 3

- No option
- V Emergency lowering, fork head bore parallel to clamping lever (for actuator design "A", L+30 mm)
- W Emergency lowering, fork head bore 90° to clamping lever (for actuator design "A", L+30 mm)

Customized

¹⁾ EKZm: mechanical anti-pinching min. stroke 150 mm up to 300 mm

Options shown in red are only available on request. Contact Ewellix for more information on minimum quantities and additional costs.



ewellix.com

© Ewellix

All contents of this publication are the property of Ewellix, and may not be reproduced or given to third parties (even extracts) without permission. Although great care has been taken in the production of this catalog, Ewellix does not take any responsibility for damage or other loss resulting from omissions or typographical errors. The photo may differ slightly in appearance from the actual product. Due to continuous improvements being made in our products, the product's appearance and specifications are subject to change without notice.

PUB IL-06005/1-EN-March 2020

Certain image(s) used under license from Shutterstock.com.